

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCT

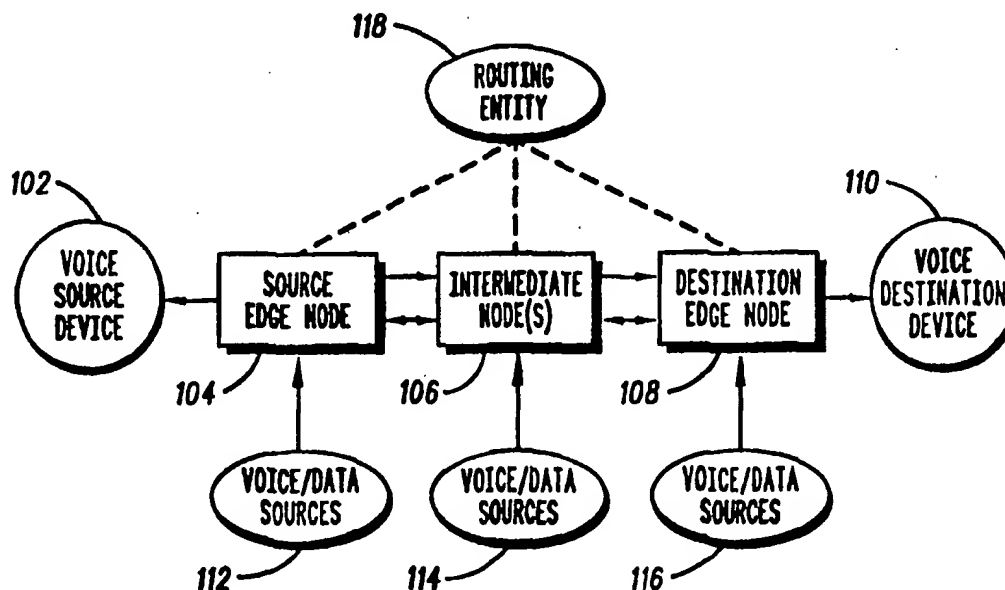
WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04J 3/24, H04L 12/54</p>	<p>A1</p>	<p>(11) International Publication Number: WO 95/14337 (43) International Publication Date: 26 May 1995 (26.05.95)</p>
<p>(21) International Application Number: PCT/US94/08931 (22) International Filing Date: 8 August 1994 (08.08.94) (30) Priority Data: 08/123,822 19 November 1993 (19.11.93) US (71) Applicant: CODEX CORPORATION [US/US]; 20 Cabot Boulevard, Mansfield, MA 02048 (US). (72) Inventors: KLINE, Richard, B.; 11 N. Lewis Park Drive, E. Walpole, MA 02032 (US). NG, Dennis; 126 Indian Meadow Drive, Northboro, MA 01532 (US). (74) Agents: PARMELEE, Steven, G. et al.; Motorola Inc., Intellectual Property Dept./JRW, 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p>		<p>(81) Designated States: AU, CA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.</p>

(54) Title: METHOD FOR ADAPTIVE SMOOTHING DELAY FOR PACKET VOICE APPLICATIONS



(57) Abstract

A communication system transmits packetized voice data from a voice source (102) to a voice destination (110). At the voice destination (110), the packets are accumulated in a buffer (208), sequentially played out and the time the packet waits in the buffer (208) is monitored. The time future voice packets are played out is accordingly adjusted.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD FOR ADAPTIVE SMOOTHING DELAY FOR PACKET VOICE APPLICATIONS

Field of the Invention

5

This invention relates to communication networks generally, and specifically to communication networks transporting packetized voice communication.

10

Background of the Invention

Cell relay and fast packet switching are both switching methods for integrated communication networks. Such networks can carry diverse traffic types such as data, voice, CBR (constant bit rate), image and video traffic. Using a fast packet or cell relay mechanism, such as ATM (Asynchronous Transfer Mode), to switch different traffic types in the network, achieves integration of both transmission and switching resources.

20

Fast packet (FP) and cell relay (CR) networking technologies are very similar in nature and solve many networking problems. Both allow the construction of efficient and cost effective networks that carry diverse traffic types such as voice, video, CBR, and bursty data traffic. Both FP and CR networks convert (adapt) various types of traffic to a common format before transporting the traffic across the network. In both cases, the common form is a "small packet", where small is typically 64 or less octets. Each packet contains a network header containing destination or logical address, congestion level information, priority information, etc., and a payload portion containing the user's data.

30

The efficiency and diversity of CR and FP networks is obtained by the adaption of the traffic source, at the edge of

35

the network, to a common form or packet. This allows network switches to handle the traffic in a common way inside each type of network independent of the source type.

5 However, this requires, at the source edge of the network, the adaptation of diverse traffic types to the common form, or packets. At the destination edge of the network, the packets need to be adapted back to the diverse original forms. These edge adaption procedures are traffic
10 source type dependent. For example, CCITT (International Telegraph and Telephone Consultative Committee) AAL1 (ATM adaption layer 1) protocol, specified in CCITT draft recommendation I.363, is used for adaption of CBR traffic to ATM cells (packets), and CCITT AAL5 (ATM adaption layer 5)
15 protocol, also specified in CCITT draft recommendation I.363, is used for adaption of HDLC (high level data link control) framed traffic to ATM cells.

 "Packet networks" refers to either fast packet switching
20 systems, or cell relay switching systems. "Packet voice" refers to voice which has been adapted to a form appropriate for a packet system.

 Voice may be transported through a packet network as
25 follows. The analog voice is first digitized and converted to 64 Kb/sec (kilobits per second) PCM (pulse code modulation). The resulting bit stream is optionally compressed using a voice compression algorithm, such as a 32 Kb/sec ADPCM coder (Adaptive Differential Pulse Code Modulation), or a 16 or
30 8 Kb/sec CELP coder (Code Excited Linear Predictor). The resulting bit stream is segmented into packets at the edge of the network by collecting bits for a time duration (denoted generally by "del_T"). A network packet header is attached to each voice packet. These packets are multiplexed with
35 packets from other sources (both voice and non-voice) and are

queued before transmission on internodal links in the network.
At the destination edge, the voice is reconstructed by
stripping the header and playing out the bits in the packet
(may require optional decompression) at the nominal rate of
5 the voice connection (typically 64 Kb/sec PCM).

Although the packets from a voice packet transmitter
are generated at uniform intervals, spaced del_T time units
apart, they do not arrive at the destination uniformly spaced
10 due to different queuing delays that each individual packet
encounters as it traverses the packet network. Since packets
at the voice destination must be played out at uniform
intervals, also spaced del_T time units apart, the variation in
network queuing delay is compensated for by using a
15 smoothing buffer at the voice packet receiver. When the
initial (first) packet of a call arrives at the voice packet
receiver, it is enqueued in the smoothing buffer and is not
played out immediately. Instead, it is held in the smoothing
buffer for a predetermined amount of time (referred to as the
20 initial smoothing delay) before being dequeued and playout.
After the first packet is played out, subsequent packets are
played out at uniform time intervals (uniform spacing) of
 del_T time units. If the smoothing delay is chosen large
enough, then the probability of a smoothing buffer underflow
25 (i.e., a subsequent packet arrives too late to be played out) for
subsequent packets is negligible.

The smoothing delay should be kept at an absolute
minimum for two reasons. First, the smoothing buffer at the
30 destination receiver is finite. Therefore, buffer overflow
should be avoided. Second, for voice applications, the total
"end-to-end" delay is perceivable by network users. If the
total delay of the voice path exceeds 200 milliseconds, the
telephone conversation may be perceived (by the two parties
35 having a conversation) as being a "long distance connection".

Thus, the total end-to-end delay should be less than 200 milliseconds.

Further, observed network delay and packet jitter
5 characteristics may change rapidly over time (as other
connections are set up and taken down in the network).
Therefore, the mechanism must be robust and capable of
adjusting the smoothing delay to minimize the total end-to-
end delay while preventing smoothing buffer underflows, and
10 also compensate for any other network delay irregularities.

Thus, a smoothing delay mechanism which provides a
simple method to control smoothing buffer underflows at the
destination edge of a voice connection in a fast packet
15 network, provides a simple mechanism to minimize the
smoothing delay value, adapts to changing network delay
characteristics, adjusts for clock drift between sending and
receiving nodes and is robust to other network impairments,
such as dropped packets, bit errors, packets falsely inserted
20 into the voice channel from other sources, is desirable.

Brief Description of the Drawings

FIG. 1 is a general packet network.
25 FIG. 2 is a node in packet network.
FIG. 3 is a voice packet.
FIG. 4 is voice playout process
FIG. 5 is a flowchart of the adaptive smoothing delay
process.
30 FIG. 6 is the Voice Packet Playout Process

Description of the Preferred Embodiment

A smoothing delay mechanism with such desirable
35 characteristics includes several components.

First, at call establishment time, the required smoothing delay is calculated by the connection control, - routing subsystem. The required worst case smoothing delay
5 varies call by call depending upon the specific path assigned to the call, but is known for a specific call once the path map of the call is known. For example, the worst case smoothing delay required is the sum of the individual worst case delays for all the queues that the call traverses. Other specific
10 statistical worst cases can be calculated for calls that traverse many inter-nodal queues.

Second, the enqueueing process at the packet receiver attaches a "received" time stamp at the instant that the
15 packet is received at the receiver. It is not necessary to synchronize said time stamp with the packet transmitter (i.e., across the network). It will be demonstrated that the time stamp has local significance only, and there is no need for an "absolute" clock.

20 Third, at play out, the packet voice receiver, upon dequeuing the packet from the smoothing buffer, calculates the waiting time of the packet, which is defined as the total amount of time that the packet spent in the smoothing buffer.
25 The waiting time of each packet is calculated by subtracting the received time stamp, attached to the packet in the previous step, from the packet receiver's local timer at the time instant that the packet is played out. The voice packet receiver also creates a histogram of receive packet waiting
30 times.

Finally, the histogram is periodically analyzed to compare the actual queuing delays encountered by the voice packets with the expected queuing delays, and then the
35 smoothing delay is adaptively adjusted to obtain the minimum

possible delay for the call.

Network 100, shown in FIG. 1, is a generalized representation of a voice call in a packet network. Packet
5 networks in use may be more complicated than that shown in FIG. 1. Network 100 consists of source edge node 104, intermediate packet switching nodes 106 and destination edge node 108. Generally, voice and data networks consist of many source nodes, intermediate nodes and destination nodes. The
10 nodes are geographically distributed, but operably connected through internodal communication links. Voice source 102 is operably connected to edge node 104. Edge node 104 converts the voice signal from the voice source to voice packets and sends voice packets through network 100 to the destination
15 edge node 108. Destination edge node 108 converts voice packets back to a voice signal or original (or equivalent) form and sends resulting voice signal to voice destination device 110 which is operably connected to edge node 108. FIG. 1 illustrates the path from voice source device 102 to voice
20 destination device 110. Typically, there would be a reverse path allowing voice communication from device 110 to 102. The reverse path is not shown in FIG. 1, but is an obvious extension of the above.

Voice packets, traversing network 100 from source edge
25 node 104 to destination edge node 108 follow a specific path through network. The path may include multiple intermediate nodes 106. The path is fixed at call establishment time (the beginning of the voice call) by a routing entity 118 in network 100. Routing entity 118 may be either distributed or
30 centralized, but in either case, it is capable of finding an acceptable path, if one exists, from source edge node 104, through the network 100 to destination edge node 108. After finding the path, routing entity 108 has knowledge of the transmission characteristics of the call, such as expected
35 delay (i.e., how long it will take for packets to traverse from

source node 104 to destination node 108) and worst case queuing jitter (i.e., how much the delay varies for different packets.).

5 FIG. 2 contains a general depiction of a node 200. The node could be source edge node 104, intermediate node 106, or destination edge node 108. A node receives packets on one or more receive internodal links 202 from other nodes in network 100. The packet switch 204 in node 200 examines
10 address information in each received packet, and temporarily stores the packet in an appropriate queue in local buffer 208. Local buffer 208 is operably connected to both packet processor 212 and packet switch 204. Packets may be directed to/from local buffer by either packet processor 212,
15 or by packet switch 204. Packet processor 212 may direct packets to buffer 208 for subsequent transmission on one or more internodal links 206 by packet switch 204, or for other purposes. Similarly, packet switch 204 may direct packets to
20 buffer 208 for subsequent packet processing by packet processor 212, or for subsequent transmission on one of a possible plurality of internodal links 206, or for other purposes.

Local buffer 208 may be a single centralized memory, or else, a distributed memory within the node, but consists of
25 one or more memories which are partitioned appropriately to store packets 210 until needed. Packet processor 212 may consist of a single centralized processor, or a plurality of distributed packet processors.

30 Packet processor 212 is also operably connected to a plurality of voice and data sources through a plurality of access interfaces 214. Packet processor 212 receives voice (or data) from sources through access interface 214, performs adaptions on the received voice (or data) to convert voice (or
35 data) to packets, and then directs packets to local buffer 208

for subsequent transmission on internodal links 206.

Similarly, packets received on internodal links 202 and stored in local buffer 208 by packet switch 204, may be subsequently removed by packet processor 212 and converted from packet
5 form to the original form compatible with source (voice or data) and directed to access interface(s) 214. Voice and data source devices that may be connected to access interface(s) 214 such terminals, LANs (local area networks), modems, PBXs (Private Branch Exchange), and telephones.

10

In voice applications, packet processor 212 is a voice packet processor. Furthermore, the processing performed by voice packet processor 212 which occurs in the direction from the access interface 214 towards the network is packet voice
15 transmit operations (PVT). The processing which occurs in the direction from the network to the access interface 214 is the packet voice receiver (PVR).

FIG. 3 shows packet 300. Packet 300 is a series of
20 bytes. Packet 300 has header 302 and payload 304. Header 302, shown with three bytes, contains information used by nodes 104, 106, 108 to relay packet 300 to its destination. Payload 304, here shown with 44 bytes, contains data and information related to the voice source. Part of payload 304
25 is sequence number 306. Sequence number 306 is assigned by voice packet processor 212. Each successive voice packet is assigned a successive sequence number 306.

Packetization of voice by voice packet processor 212
30 consists of accumulating voice samples from voice source 102 operably connected to voice packet processor 212 through access interface 214. After a sufficient number of samples have been accumulated, the voice samples may be compressed by the voice packet processor 212 and placed in payload 304
35 along with sequence number 306. Header 302, containing a

connection identifier for fast packet 300, is attached by the voice packet processor 212 to payload 304 for use in relaying fast packet 300 to its destination 108 within network 100.

5 Packets are transmitted, by voice packet processor 212 at the source edge node 104 at uniformly spaced intervals of del_T time units. Each successive sequence number 306 in voice packet 300 represents a change in time of del_T units. Since the packet voice processor 212 at the destination edge
10 node 108 also dequeues packets at uniformly spaced time intervals of del_T time units, sequence number 306 may be used to determine the relative time that each packet is to be played out (dequeued). Therefore, sequence number 306 serves as a time stamp, indicating the relative playout time of
15 received packets at the PVR, and a sequence number, for detecting packets lost by packet network 100.

 The dual purpose of the sequence number is true when the voice packet processor includes a voice activity detection
20 mechanism. In this case, the PVT detects the presence or absence of voice (so called talkspurts), and only sends packets when it detects the presence of active speech signals in the audio channel. Thus, the PVT will send packets uniformly
25 space by del_T units of time during a talk spurt, but will not send packets during silence intervals. However, the PVT keeps incrementing the sequence number at the same del_T time increments even during silence intervals when no packets are sent. Thus, when the next talkspurt occurs, the transmitted
30 packets will contain sequence numbers that correspond to the expected relative playout times at the PVR. Thus, the PVR can continue to use the sequence number in the voice packets as a time stamp and a sequence number.

 Referring once again to FIG. 1, source edge node 104 is
35 shown coupled to voice source 102. Voice source 102 may be

10

a telephone, PBX, or any other device that generates voice signals.

Source edge node 104 contains packet processor 212
5 which converts voice signal to packet form, and then enqueues
packet in buffer 208 for subsequent transmission on a
specific internodal link (in case there are a plurality of
internodal links 206). The enqueued voice packets must
10 contend with packets from other voice and data sources 112
for transmission in network 100. The voice packets are
transmitted via packet switch 204 to intermediate node 106.
While one intermediate node 106 is shown, a plurality (but
possibly, zero) of intermediate nodes may be in the path from
15 source edge node 104 to destination edge node 108 for a
specific voice call. As the packet of a voice call travels along
the specific path associated with the call, it encounters a
plurality of such queues. Each encountered queue increases
the expected queuing jitter which will be observed by the PVR
(212) at the destination edge node 108.

20

At intermediate node(s) 106, the voice packets are again
enqueued for transmission with other voice and data packets
from other sources and other internodal links. The voice
packets associated with the said voice call are transmitted
25 along the path towards the destination edge node 108.

At destination edge node 108, the voice packets are
directed to the local buffer 208 and the (voice) packet
processor 212 removes the voice packets and converts the
30 voice packets to a form compatible with the voice destination
device 110. The process of removing the voice packets from
the local buffer 208, converting the voice packet from packet
form to a voice signal compatible with the voice destination
device 110 is referred to as the voice playout process. The
35 exact time instance when this process occurs for a specific

voice packet is referred to as the playout time of the said packet.

5 A portion of buffer 208 is set aside as a voice packet receive buffer for the voice packet processor 212. Playout is accomplished by placing the packets in the voice packet buffer (enqueueing) and, at a later time, retrieving the packets from the voice packet buffer (dequeueing) before converting packet to original voice signal and playing out the voice signal to the
10 voice destination device 110. The voice packet buffer is referred to as the smoothing buffer.

The smoothing buffer 402, along with the enqueue 404, dequeue 406, and packet conversion 408 processes are
15 illustrated in FIG. 4. Packets are inserted in smoothing buffer 402 by an enqueue process 404 and removed from the buffer by a dequeue process 406. The process described herein simultaneously minimizes the waiting time that packets spend in the smoothing buffer before being dequeued and
20 converted to original form, minimizing the probability of FIFO (First In, First Out) underflow, and also preserves the exact spacing between talkspurts. This is accomplished by the following method:

25 At the voice packet processor 212 in the source edge node 104, hereafter referred to as the PVT (packet voice transmitter), sequence number 306 is included in each voice packet 300. Sequence number 306 allows the voice packet processor 212 in the destination node 108, hereafter referred to as the PVR (packet voice receiver), to detect when a packet
30 has been dropped by the network. Packets are marked with a sequence number that is incremented for each successive fast packet, and which wraps around to zero after reaching some maximum. For example, if PVR receives sequence numbers 1-2-3-5-6, it can discern that packet number 4 is missing. The
35

PVT will send a continuous stream of uniformly spaced packets. If at the PVR, a sequence number 306 is found to be missing, the packet receiver knows that the packet was dropped by the network, and will therefore interpolate the speech to fill in the audio channel for the missing packet.

The number of bits required to represent the sequence number 306 in each voice packet is determined by the time interval between packet transmissions, del_T , and the worst case smoothing delay that one needs to compensate for the queuing jitter that voice packets experience as they traverse the packet network from source edge node 104 to destination edge node 108. To unambiguously span the worst case queuing jitter at the receiver, the time span of the sequence number 306 (i.e., how often the modulo counter reset to zero) must be greater than the queuing timing jitter.

For example, if del_T is chosen to be 5 milliseconds, or equivalently 40 voice samples (bytes) per voice packet, if PCM (pulse code modulation) encoding is used by the PVT, and if the sequence number 306 was allocated 6 bits (i.e. 64 counts) in the voice packet, then the sequence number 306 rolls over every $64 * 5 = 320$ milliseconds, which is much larger than the worst case queuing jitter (typically 100 milliseconds, or less, for packet voice connections).

Fig. 5 shows a flowchart of the adaptive smoothing delay process 500. Each time a voice packet playout occurs (step 502), the sequence number 306 of the voice packet is checked (step 505). If the sequence number is not valid, the packet is discarded (step 510), and the next packet (if there is one) is examined (step 502). If the sequence number is valid, the packet is playout and the waiting time of the packet is computed (step 515), where the waiting time is defined as the difference between the time instance that the packet was

enqueued into the smoothing buffer and the time that the packet was dequeued from the smoothing buffer. A histogram of waiting times is then updated (step 520).

5 After every N'th packet is played out, the histogram is post processed to find the longest waiting delay (step 530), the longest delay is smoothed (step 535), the histogram is cleared (step 540) in preparation for calculation of a new histogram over the next N packets. The parameter N is chosen
10 to equal a fixed time interval (typically seconds).

 If there is either a silence gap in the speech or if a pre-determined time "T" (typically minutes) has elapsed (step
15 545), then the longest smoothed waiting time is compared with the maximum expected waiting time, CDV_Max (step 550). If the two are equal, then the smoothing delay is set at the optimum value, and no adjustment to the playout process is required.

20 If the two are not equal, then the playout time of the next received packet (and the playout times of subsequent packets) is adaptively adjusted such that the expected value of subsequent measured longest waiting times is equal to CDV_max (step 555).

25 Quantitatively, the i'th voice packet arrives at the destination after a time period equal to d(i). It is possible to break d(i) into two parts, d_fixed and d_var(i).

$$30 \quad d(i) = d_{\text{fixed}} + d_{\text{var}}(i) \quad (\text{Eq } 1)$$

where

 d_fixed = the fixed transmission delay (the same for
35 each packet)

and

$d_var(i)$ = the queuing delay experienced by the i 'th packet.

5 For a specific call (i.e. a specific path through the network) the variable portion of the delay, $d_{var}(i)$ can be assumed to be bounded between 0 and some maximum known value which we will refer to as the maximum cell delay variation, CDV_{max} . The value of CDV_{max} may be either a
10 known network wide parameter, or alternatively, it can be calculated by routing entity 118 on a call by call basis (i.e. known for the specific path chosen by the routing entity at call establishment time)

$$0 < d_var(i) < CDV_max \quad (Eq. 2)$$

FIG. 6 illustrates voice packet playout process 600 and the received packets 602, illustrating the typical time jitter experienced by the individual packets. The packets are not uniformly spaced in time (like they were at the output of the PVT 212). When the PVR 212 receives the packet, the enqueueing process 404 attaches a received time stamp to the packet.

25 Consider the following scenario illustrated in FIG. 6. When the first packet 602 of a call is received, the packet receiver applies an initial smoothing delay 604 equal to CDV_max. After the initial smoothing delay expires, the

30 packet receiver plays out the first voice packet (i.e., converts the voice packet to original form 606). The packet receiver is then executed one "packet" time (del_T) later. When executed, the PVR searches the smoothing buffer 402 for a packet with the next expected sequence number. If found, then that packet

35 is played out. If no such sequence number is found, then it

15

either interpolates the speech in the audio channel (if the packet was dropped by the network) or else plays out silence 608 if the last packet was the end of a talkspurt.

- 5 The following end to end delay performance analysis applies to the above mode of operation.

Let $t(i)$ denote the transmission time of the i 'th packet.

$$10 \quad t(i) = \text{del_T} * i \quad (\text{Eq } 3)$$

where del_T is the time between (possible) packet transmissions (a time slotted system). It follows that the
15 packet reception time at the destination is given by

$$r(i) = t(i) + d(i) \quad (\text{Eq } 4)$$

- 20 where $d(i)$ is given in equation 1 above. Therefore, substituting equation 1 and 3 into equation 4:

$$r(i) = \text{del_T} * i + d_{\text{fixed}} + d_{\text{var}}(i) \quad (\text{Eq } 5)$$

- 25 Note that $r(i)$ is the "enqueueing timing" of the i 'th packet at the packet receiver.

Let $p(i)$ denote the play out time of the i 'th packet. Since a voice packet is played out every del_T time period, the playout
30 time of the i 'th packet can be expressed as:

$$p(i) = \text{del_T} * i + p(0) \quad (\text{Eq } 6)$$

35

16

where $p(0)$ is the play out time of the first packet which is given by:

$$p(0) = r(0) + CDV_max \quad (Eq \quad 7)$$

where CDV_max is the build out delay applied to the first packet before playing out the first packet (refer to FIG. 6)

Therefore, the play out time of the i 'th packet can be expressed as (substitute Eq 7 into 6)

$$p(i) = del_T * i + r(0) + CDV_max \quad (Eq \quad 8)$$

or equivalently (substituting Eq 5, with $i=0$, into 8)

$$p(i) = del_T * i + d_fixed + d_var(0) + CDV_max \quad (Eq \quad 9)$$

Note that $p(i)$ is the "dequeuing time" of the i 'th packet.

Finally, the waiting time, defined as the time duration that the i 'th packet spends in the smoothing delay buffer 402 can be expressed as the difference of the play out time (dequeue time) (equation 9) and the packet arrival time (enqueue time) (equation 5):

$$w(i) = p(i) - r(i) \quad (Eq \quad 10)$$

or equivalently

$$w(i) = d_var(0) + CDV_max - d_var(i) \quad (Eq \quad 11)$$

Since both $d_var(i)$ and $d_var(0)$ are bounded by the closed interval $(0, CDV_max)$ (Equation 2), the waiting time of all packets depends explicitly on $d_var(0)$, which is the queuing jitter that the first packet experienced when it traversed the network.

If $d_var(0)$, the variable portion of the delay of the first received packet, is equal to 0, then the waiting time $w(i)$ is given by:

$$w(i) = CDV_max - d_var(i) \quad (Eq \quad 12)$$

Since $d_var(i)$ is bounded by the closed interval $(0, CDV_max)$, refer to equation 2, it follows that the waiting time varies from 0 to CDV_max , which is the best that one can do. However, if $d_var(0)$, the variable portion of the delay of the first received packet, is equal to the maximum value CDV_max , then, substituting $d_var(0) = CDV_max$ into equation 11 yields

$$w(i) = 2*CDV_max - d_var(i) \quad (Eq \quad 13)$$

Since $d_var(i)$ is bounded by the closed interval $(0, CDV_max)$, refer to equation 2, it follows that the waiting time for this case varies from CDV_max to $2*CDV_max$. This means that the voice path will be delayed by an addition CDV_max time duration.

As explained previously, the present invention solves the above problem by adding the following adaptive loop to the smoothing delay algorithm. The algorithm is initialized by

18

adding a build out delay, equal to CDV_max to the first packet received before playing the first packet out as described above and shown in FIG. 6. Subsequent packets are played out according to Eq 6 above (for the first few seconds - typically
5 2 seconds). However, for the subsequent packets, the following algorithm is used to adaptively adjust the smoothing delay (note: the following pseudo code is functionally equivalent to the flowchart contained in FIG. 5):

```
10  for each voice packet received with valid sequence number
    {
        playout the packet at time  $p(i)$ ,
        compute the waiting delay  $w(i)$ ,
        where  $w(i)$  is defined to be the time difference
15  between the enqueue and dequeue time instances
        for each packet.

        Update a histogram of waiting times,
        if N packets have been received, then
20  {
            post process the histogram to find the longest
            valid waiting time,
            smooth the measured longest waiting time,
            and clear the histogram and begin compiling a
25  new histogram over the next N voice packets.
        }

        if a silence gap exists in the speech,
        or a time period of T minutes exists with no silence gap,
30  then do the following:
        {
            if the longest smoothed measured waiting time is
            not equal
            to the  $CDV\_max$  value, then do the following
35  {
```

19

```
time          make a timing adjustment to the playout
              of future voice packets such that the
expected      value of future longest waiting time is equal
5             to CDV_max.
              }
            }
          }
10
```

The above algorithm adjusts the smoothing delay to the optimum value, where the waiting times are bounded by the closed interval (0, ... CDV_max). The algorithm will also compensate for clock drift between the source and destination nodes, and provide robustness during network re-routes.

While the method described above specifically refers to voice packets, the method could easily be used for any packetized data traffic, such as constant bit rate traffic or asynchronous data traffic.

We claim:

1. In a cell relay network, a method of playing out a plurality of voice packets, the voice packets originating from a voice packet transmitter and received by a voice packet receiver, comprising:

accumulating voice packets in a buffer;
sequentially playing out the voice packets from the buffer;
monitoring the time at least one voice packet spends in the buffer prior to playing out the packet; and
adjusting the time when at least one future voice packet is played out based upon the monitored time.

2. The method of claim 1 including the step of monitoring the time a plurality of voice packets spend in the buffer prior to playing out the packets.

3. The method of claim 2 where the step of monitoring the time a plurality of voice packets comprises the steps of:

for each of the plurality of voice packets, monitoring the time that voice packet spends in the buffer.

4. The method of claim 3 including the step of constructing a histogram of the times that each voice packet spends in the buffer.

5. The method of claim 3 including the step of determining from the monitored time the maximum amount of queuing jitter.

6. The method of claim 4 including the step of determining from the monitored time the maximum amount of queuing jitter.

7. The method of claim 3 including the step of determining, for the plurality of voice packets, the maximum time one of said packets spent in the buffer.

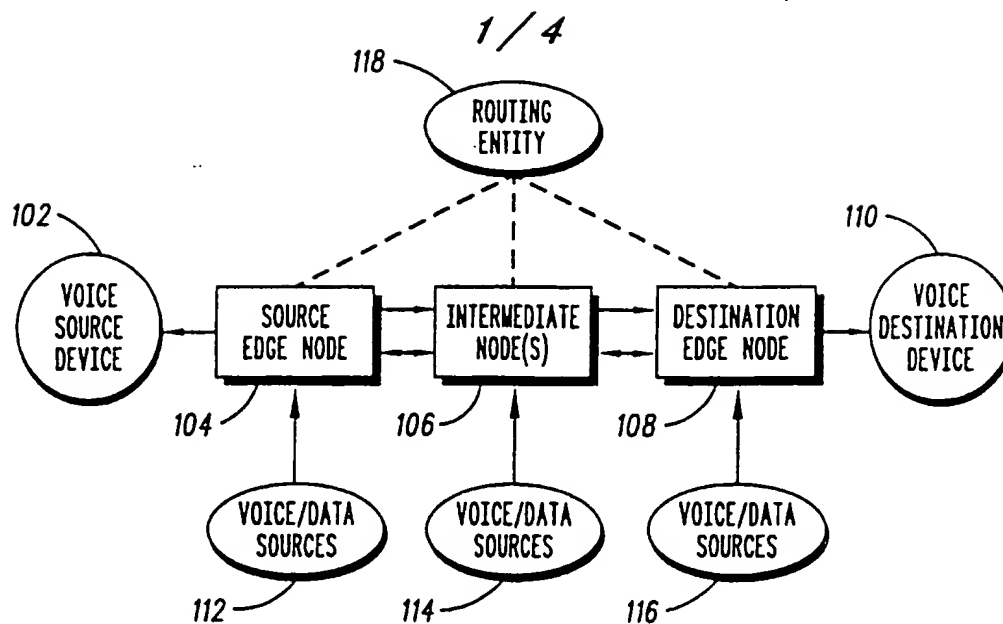
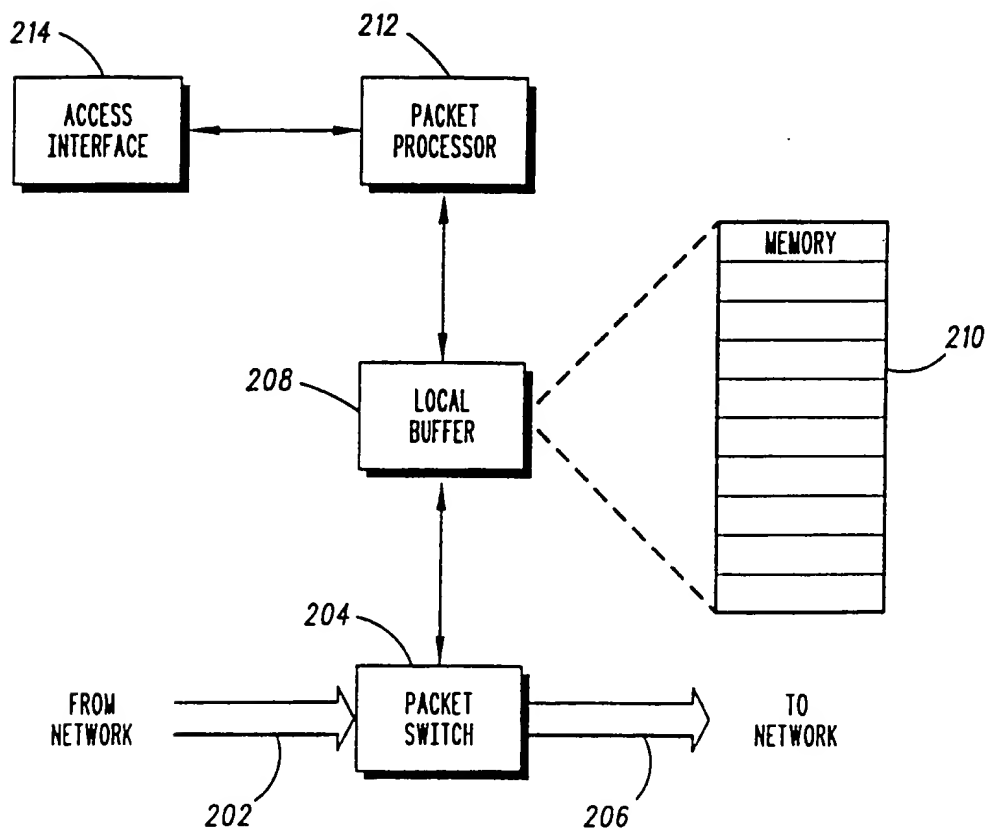
5

8. The method of claim 7 where the step of adjusting the time when at least one future voice packet is played out comprises:

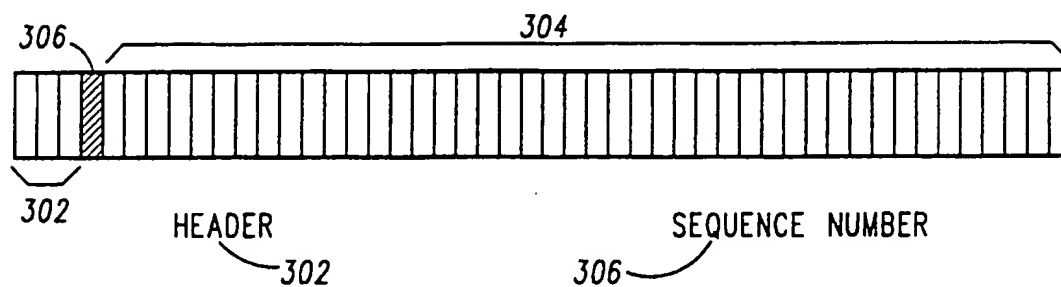
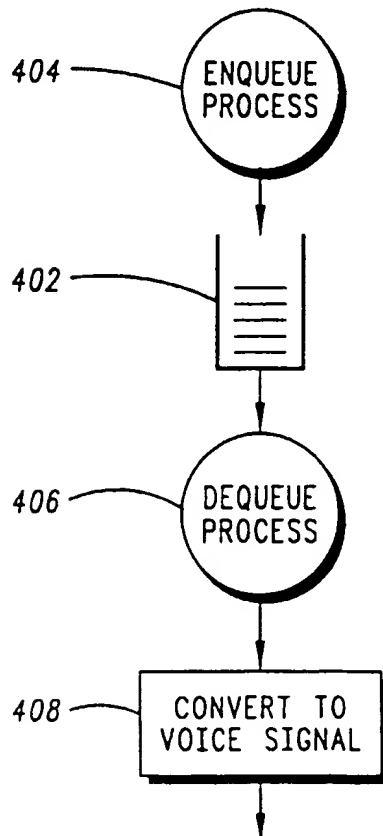
adjusting the waiting when at least one future voice packet is
10 played out, based upon the maximum time one of said packets spent in the buffer.

9. The method of claim 7 where the step of adjusting the time when at least one future voice packet is played out is
15 based upon the maximum time one said packets spent in the buffer.

10. In a cell relay network, where the network is comprised of plurality of cell relay switches, a method of playing out a
20 plurality of voice packets, the voice packets originating from a voice packet transmitter at a first edge node of the network and received by a voice packet receiver at a second edge node of the network, the voice packets going from the voice packet transmitter to the voice packet receiver along a specific path
25 of cell relay switches in the network, where a routing entity determines the specific path, comprising:
determining the maximum amount of queuing jitter anticipated to be encountered by any voice packet for the specific path;
30 accumulating voice packets in a buffer;
sequentially playing out the voice packets from the buffer; and
adjusting the time when at least one future voice packet is played out based upon the maximum amount of queuing jitter anticipated to be encountered by any voice packet for the
35 specific path.

*FIG. 1**FIG. 2*

2 / 4

*FIG. 3**FIG. 4*

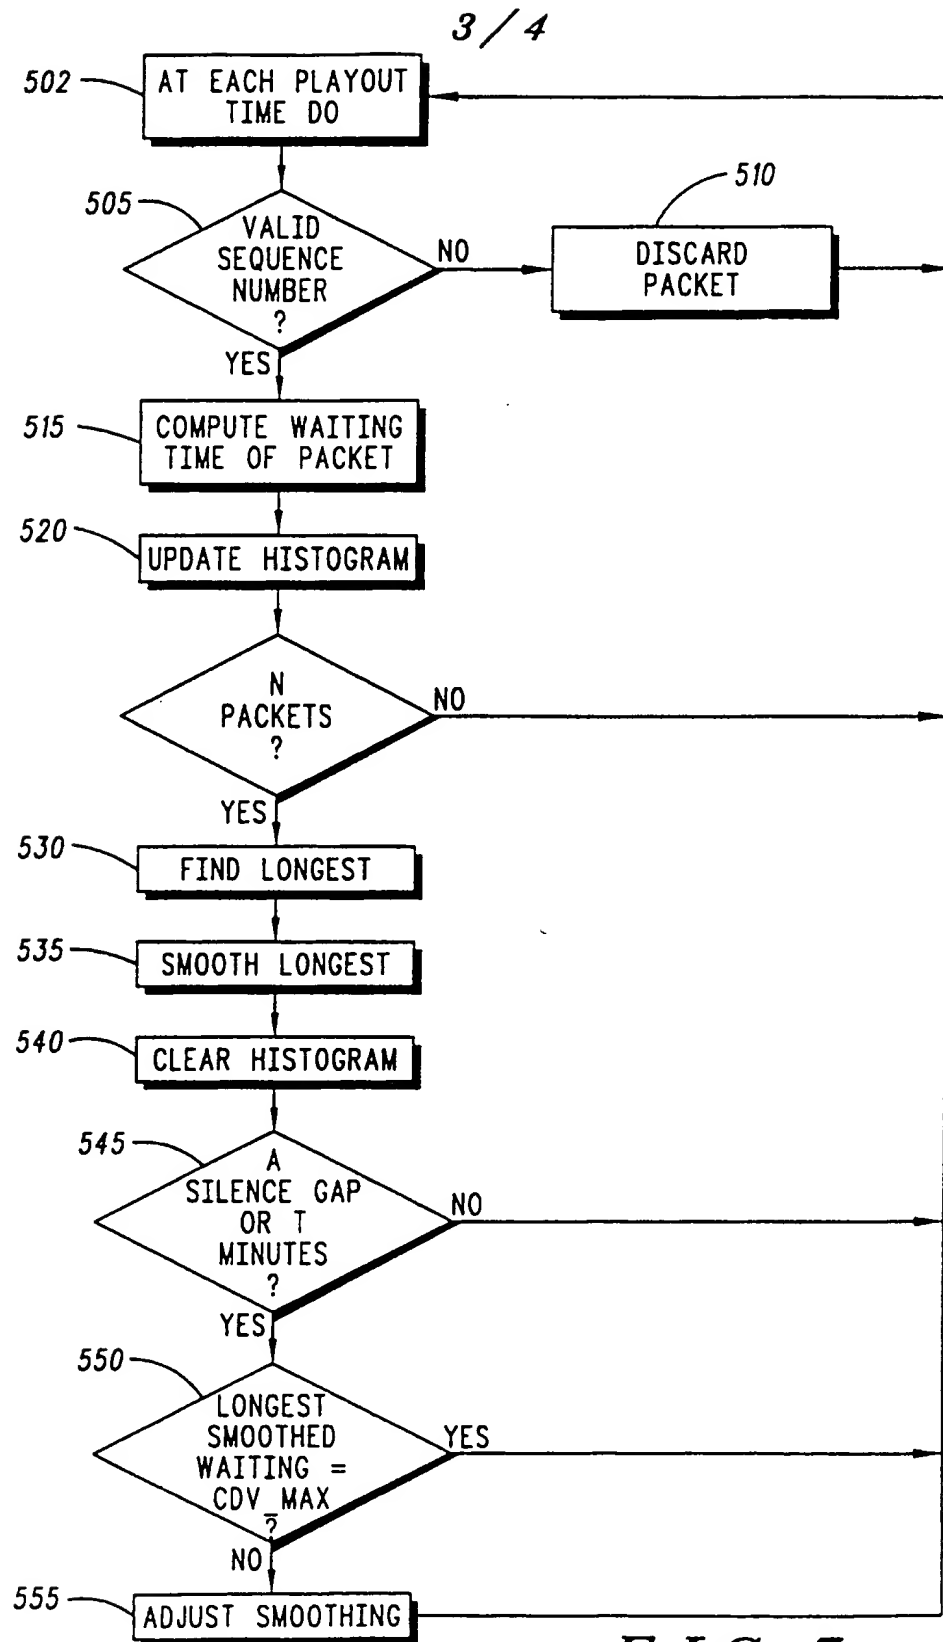


FIG. 5

4 / 4

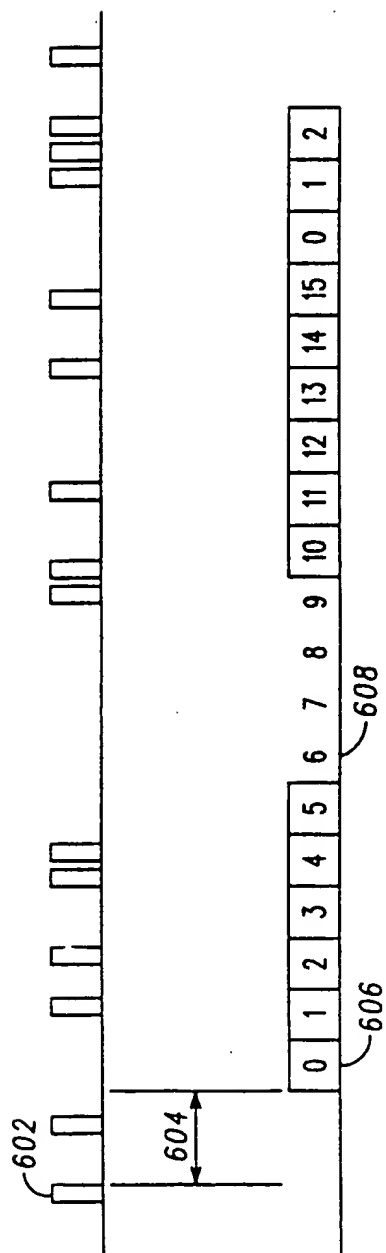


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/08931

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04J 3/24; H04L 12/54
US CL : 370/61, 94.2

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS SEARCH TERMS: VOICE PACKET#, BUFFER, DELAY, QUEUE, TIME STAMP, JITTER

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P ----- X,Y	US, A, 5,278,825 (WALLMEIER et al.) 11 January 1994, col. 2, lines 15-64	1-3 ----- 4-9
Y	US, A, 4,748,620 (ADELMANN et al.) 31 May 1988, col. 27, line 29 to col. 30, line 28.	4-9
A	US, A, 4,453,247 (SUZUKI et al.) 05 June 1984, entire document	1-10
A	US, A, 4,607,363 (PLATEL et al.) 19 August 1986, entire document	1-10

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

06 OCTOBER 1994

Date of mailing of the international search report

09 JAN 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ALFUS H. HSU

Telephone No. (703) 305-4377

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/08931

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,894,823 (ADELMANN et al.) 16 January 1990, entire document.	4-9
A	US, A, 5,148,429 (KUDO et al.) 15 September 1992, entire document.	1-10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US94/08931

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

US CL: 370/13, 17, 54, 60, 60.1, 61, 94.1, 94.2, 110.1, 118; 379/67, 88, 269, 271, 272; 340/825.03, 826, 825.06, 825.15, 825.18; 381/29, 31